

A Division Of Jaftex Corporation www.henryglassfabrics.net



Finished Size of Project: **46" x 19" (1.17m x 0.48m)**Fabric Collection Name and Designer: **Crow-Mazing by Jan Mott**

Technique: Pieced

Project Designed by: Matthew Pridemore of The Whimsical Workshop

Skill Level: Advanced Beginner



A Division Of Jaftex Corporation

www.henryglassfabrics.net

Fabric Requirements

DESIGN	COLOR	ITEM ID	YARDAGE
(A) Sunflowers & Crows	Ochre	3439-38	⅓ yard (0.30m)
(B) Texture	Rust	3443-35	½ yard (0.46m)*
(C) Squares Patch	Gold	3444-33	½ yard (0.46m)
(D) Scrolls	Indigo	3442-77	½ yard (0.46m)

^{*} includes binding









Backing (Purchased Separately)

44" (1.12m) wide Small Medallions

Indigo 3441-77

1 % yards (1.49m)



Backing 44"

Additional Materials:

- Batting 54" x 27"
- · Thread and sewing supplies



A Division Of Jaftex Corporation

www.henryglassfabrics.net

Cutting Instructions

Notes:

WOF= Width of Fabric • LOF = Length of Fabric

Fabric A, cut:

- (1) 9" x WOF strip; sub-cut
 - (3) 9" squares.

Fabric B, cut:

- (1) 4 %" x WOF strip; sub-cut
 - (2) 4%" squares and (2) 3%" squares. Cut the 4%" squares across (1) diagonal to make (4) 4%" triangles.
- (4) 2 ½" WOF strips for the binding.

Fabric C, cut:

- (1) 3 %" x WOF strip; sub-cut
 - (2) 3 %" squares and (4) 1 %" x 12" strips.
- (1) 3 ¾" x WOF strip; sub-cut
 - (2) $3 \frac{3}{4}$ " x 17" strips.
- (3) 1 ¾" x WOF strips. Sew the strips together end to end with diagonal seams and cut
 - (2) $1 \frac{3}{4}$ " x 46 $\frac{1}{2}$ " strips.
- (1) 1 ½" x WOF strip; sub-cut
 - (4) 1 ½" x 4 ½" strips.

Fabric D, cut:

- (1) 9" x WOF strip; sub-cut
 - (6) 9" x 3 $\frac{1}{2}$ " strips and (2) 3 $\frac{1}{2}$ " squares. Cut the squares across (1) diagonal to make
 - (4) 3 %" triangles.
- (1) 4 ½" x WOF strip; sub-cut
 - (4) 4 ½" x 9" strips.

Backing, cut:

(1) 54" x 27" LOF strip for the backing.

A Division Of Jaftex Corporation

www.henryglassfabrics.net

Sewing

Sew using a ¼" seam allowance with right sides together (RST) unless otherwise indicated. Press seams towards the darker fabric, unless otherwise indicated.


The arrows in the figures represent the fabric print direction. Pay attention to the fabric and unit orientations when assembling the various components.

Block Assembly


1. Place (1) 3 ½" Fabric B square on top of (1) 3 ½" Fabric C square, right sides together. Draw a line across the diagonal of the top square (Fig. 1). Sew ¼" away from each side of the drawn diagonal line (Fig. 1). Cut the (2) squares apart on the drawn diagonal line (Fig. 2) to make (2) half-square triangles. Trim the half-square triangles to measure 3 ½" square to make (2) Unit 1 squares (Fig. 3). Repeat to make (4) Unit 1 squares total.




- 2. Sew (1) 3 ½" x 9" Fabric D strip to the left side of (1) 9" Fabric A square to make (1) Unit 2 strip (Fig. 4).
- 3. Sew (1) 3 $\frac{1}{2}$ " x 9" Fabric D strip to the right side of (1) 9" Fabric A square to make (1) Unit 3 strip (Fig. 5).



- 4. Sew (1) Unit 1 square to the left end of (1) $9" \times 3 \%"$ Fabric D strip. Sew (1) $12" \times 1 \%"$ Fabric C strip to the top of the newly sewn block to make (1) Unit 4 strip (Fig. 6). Repeat to make a second Unit 4 strip.
- 5. Sew (1) Unit 1 square to the left end of (1) $9'' \times 3 \frac{1}{2}''$ Fabric D strip. Sew (1) $12'' \times 1 \frac{1}{2}''$ Fabric C strip to the bottom of the newly sewn block to make (1) Unit 5 strip (Fig. 7). Repeat to make a second Unit 5 strip.




- 6. Sew together (1) Unit 4 strip, (1) Unit 2 strip and (1) Unit 5 strip, lengthwise and in that order from top to bottom, to make (1) 12" x 17" Block One rectangle (Fig. 8).
- 7. Sew together (1) Unit 5 strip, (1) Unit 3 strip and (1) Unit 4 strip, lengthwise and in that order from top to bottom, to make (1) 12" x 17" Block Two rectangle (Fig. 9).




A Division Of Jaftex Corporation

www.henryglassfabrics.net

8. Sew (1) $4\frac{1}{2}$ " x $1\frac{1}{2}$ " Fabric C strip to the top of (1) $3\frac{1}{2}$ " Fabric D triangle. Trim the Fabric C strip even with the long side of the Fabric D triangle to make (1) Unit 6 triangle (Fig. 10). Repeat to make a second Unit 6 triangle.




9. Sew (1) $4\frac{1}{2}$ " x $1\frac{1}{2}$ " Fabric C strip to the top of (1) $3\frac{1}{2}$ " Fabric D triangle. Trim the Fabric C strip even with the long side of the Fabric D triangle to make (1) Unit 7 triangle (Fig. 11). Repeat to make a second Unit 7 triangle.



10. Sew together (1) 4 %" Fabric B triangle and (1) Unit 6 triangle along their long sides to make (1) Unit 8 square (Fig. 12). The unit should measure 4 %" x 4 %".



11. Repeat Step 10 and refer to Figures 13-15 for component identification, placement and orientation to make (1) Unit 9 square, (1) Unit 10 square and (1) Unit 11 square.



- 12. Sew together (1) Unit 8 square (1) 9" x 4 ½" Fabric D strip and (1) Unit 9 square, in that order from left to right, to make the top row (Fig. 16).
- 13. Sew (1) $4 \frac{1}{2}$ " x 9" Fabric D strip to each side of (1) 9" Fabric A square to make the middle row (Fig. 16).
- 14. Sew together (1) Unit 10 square, (1) 9" x 4 ½" Fabric D strip and (1) Unit 11 square, in that order from left to right, to make the bottom row (Fig. 16).
- 15. Sew together the (3) rows from Steps 12-14 lengthwise to make (1) 17" Block Three square.




Fig. 16



A Division Of Jaftex Corporation

www.henryglassfabrics.net

16. Sew together the Block One rectangle, Block Three square and Block Two rectangle, in that order from left to right, to make the 40" x 17" Center Block (Fig. 17).

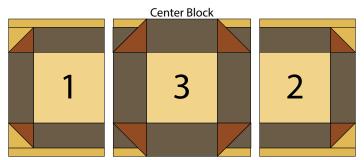


Fig. 17

Runner Assembly

(Follow the Runner Layout while assembling the top.) 17. Sew (1) 3 ¾" x 17" Fabric C strip to each side of the Center Block.

18. Sew (1) 46 $\frac{1}{2}$ " x 1 $\frac{3}{4}$ " Fabric C strip to the top and to the bottom of the Center Block to make the runner top.

Layering, Quilting and Finishing

19. Press the runner top and 54" x 27" backing well. Layer backing (wrong side up), batting, pressed quilt top (right side up) and baste. Quilt as desired and trim excess batting and backing when quilting is complete.

Binding

- 20. Cut the ends of the (4) Fabric B binding strips at a 45-degree angle and sew end to end to make (1) continuous piece of binding. Fold in half lengthwise and press wrong sides together.
- 21. Sew the binding to the front of the runner, raw edges together. Turn the folded edge to the back, and hand stitch in place.





A Division Of Jaftex Corporation www.henryglassfabrics.net

Runner Layout

